

# SMTC TYPE

— Two Side Cut Center Flange Type —



## part number structure

example **SMSTC 25 G UU-SK**


specification  
**SMTC**: standard  
**SMSTC**: anti-corrosion

inner contact diameter (dr)

retainer material  
**blank**: standard/steel  
 anti-corrosion/stainless steel  
**G**: resin

outer cylinder surface treatment  
**blank**: no surface treatment  
**SK**: electroless nickel plating  
**LF**: low temperature black chrome treatment with fluoride coating  
**SB**: black oxide (not available on anti-corrosion type)  
**SC**: industrial chrome plating

seal  
**UU**: seals on both sides  
**ZZ**: doublelip-seals on both sides

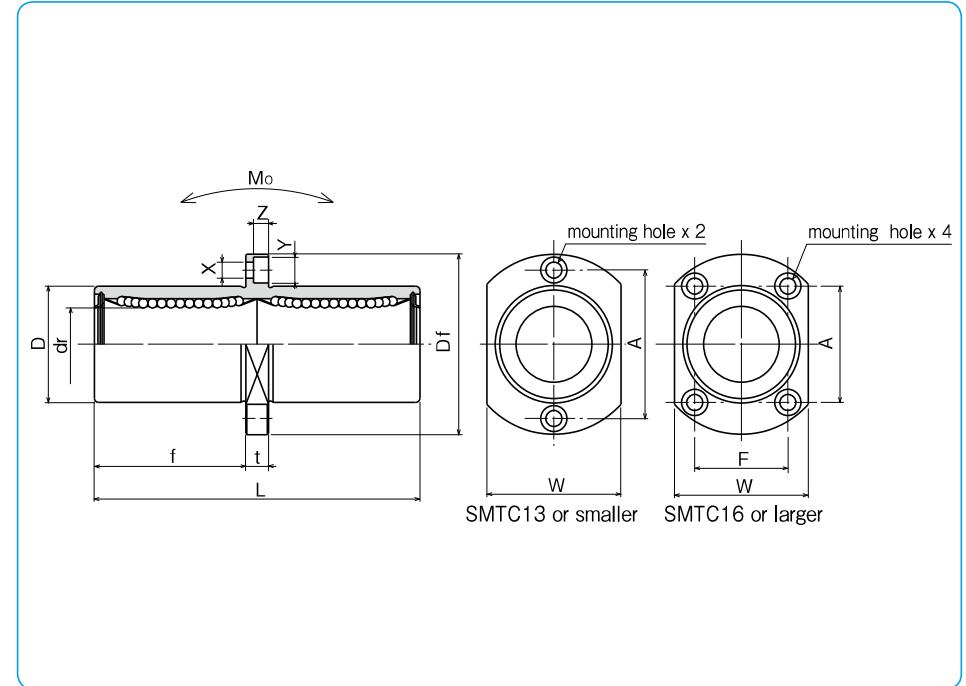

part number*				number of ball circuits	dr		major dimensions		
standard steel retainer	resin retainer	anti-corrosion stainless retainer resin retainer			mm	tolerance $\mu\text{m}$	D mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm
SMTC 6UU	SMTC 6GUU	SMSTC 6UU	SMSTC 6GUU	4	6	12	0	35	
SMTC 8UU	SMTC 8GUU	SMSTC 8UU	SMSTC 8GUU	4	8	15	-13	45	
SMTC 10UU	SMTC 10GUU	SMSTC 10UU	SMSTC 10GUU	4	10	19	0	55	
SMTC 12UU	SMTC 12GUU	SMSTC 12UU	SMSTC 12GUU	4	12	21	0	57	
SMTC 13UU	SMTC 13GUU	SMSTC 13UU	SMSTC 13GUU	4	13	23	-16	61	
SMTC 16UU	SMTC 16GUU	SMSTC 16UU	SMSTC 16GUU	4	16	28		70	
SMTC 20UU	SMTC 20GUU	SMSTC 20UU	SMSTC 20GUU	5	20	32	0	80	
SMTC 25UU	SMTC 25GUU	SMSTC 25UU	SMSTC 25GUU	6	25	40	-19	112	
SMTC 30UU	SMTC 30GUU	SMSTC 30UU	SMSTC 30GUU	6	30	45		123	

\* Seals-on-both-sides is standard.

f mm	Df mm	W mm	t mm	A mm	F mm	X×Y×Z mm	eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating			allowable static moment $\text{N}\cdot\text{m}$	mass g	shaft diameter mm
									dynamic C N	static Co N	Mo N			
15	28	18	5	20	—	3.5×6×3.1	15	15	323	530	2.18	28	6	
20	32	21	5	24	—	3.5×6×3.1			431	784	4.31	47	8	
24.5	40	25	6	29	—	4.5×7.5×4.1			588	1,100	7.24	90	10	
25.5	42	27	6	32	—	4.5×7.5×4.1			813	1,570	10.9	102	12	
27.5	43	29	6	33	—	4.5×7.5×4.1			813	1,570	11.6	123	13	
32	48	34	6	31	22	4.5×7.5×4.1			1,230	2,350	19.7	182	16	
36	54	38	8	36	24	5.5×9×5.1			1,400	2,740	26.8	247	20	
52	62	46	8	40	32	5.5×9×5.1	20	20	1,560	3,140	43.4	525	25	
56.5	74	51	10	49	35	6.6×11×6.1			2,490	5,490	82.8	645	30	

1N  $\approx$  0.102kgf 1N  $\cdot$  m  $\approx$  0.102kgf  $\cdot$  m